



PCT/GB2003/00017



INVESTOR IN PEOPLE

BEST AVAILABLE COPY

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 20 OCT 2003

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 26 September 2003



22SEP02 E749933-1/002835
P01/7700 0.00-0221896.4

The Patent Office

Cardiff Road, Newport
South Wales NP9 1RH

Request for grant of a patent

(see the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

20 SEP 2002

1. Your reference RMV/P400453

2. Patent application number
(The Patent Office will fill in this part) 0221896.4

3. Full name, address and postcode of the or of each applicant (underline all surnames) Soil Machine Dynamics Limited
Wincomblee Road
Newcastle upon Tyne NE6 3QS

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation England

7330889001

4. Title of the invention APPARATUS FOR GENERATING ELECTRICAL POWER FROM TIDAL WATER MOVEMENT

5. Name of your agent (if you have one) URQUHART-DYKES & LORD
ST NICHOLAS CHAMBERS
AMEN CORNER
NEWCASTLE UPON TYNE
NE1 1PE

Patents ADP number (if you know it) 00001644019

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (If you know it)	Date of filing (day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)

8. Is a statement of inventorship and or right to grant of a patent required in support of this request? (Answer "Yes" if:)

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body; see note (d)

YES

Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description	8
Claim(s)	3 <i>DM</i>
Abstract	
Drawing(s)	1 <i>+</i>

- 10 If you are also filing any of the following items state how many against each item:

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (*patents form 7/77*)

Request for preliminary examination and search (*patents form 9/77*)

Request for substantive examination (*patents form 10/77*)

Any other documents
(*please specify*)

11

I/We request the grant of a patent on the basis of this application.

Signature

Date 19/09/02

Urquhart-Dykes & Lord
URQUHART-DYKES & LORD

- 12 Name and daytime telephone number of person to contact in the United Kingdom

MARTIN VINSOME - 0191 2618573

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patent Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) if you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper, and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have answered "Yes" Patents Form 7/77 will need to be filed

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

APPARATUS FOR GENERATING ELECTRICAL POWER
FROM TIDAL WATER MOVEMENT

The present invention relates to an apparatus for generating electrical power from tidal water movement, and relates particularly, but not exclusively, to an apparatus for supplying electrical power of a fixed frequency to a grid of a frequency different from that of electrical power output by individual generators.

It is known to generate electrical power by means of so-called wind farms, in which a series of turbines is each driven by wind power to produce electrical output power. The efficiency of operation of any particular turbine of such a wind farm is determined by the angle of incidence of fluid driving the turbine with the turbine blades, and has a maximum value for any given speed of rotation of the turbines.

It is known to control the efficiency of turbines of wind farms by controlling the angle of incidence by adjusting the pitch of the turbine blades, or by adjusting the speed of rotation of the turbine blades relative to the stator of each turbine.

There is presently considerable interest in producing electrical power from tidal water movement, especially in countries having relatively long coastlines, such as the United Kingdom. Tidally driven turbines are generally submerged offshore, and are controlled by means of control apparatus located in offshore towers extending above each turbine, for example as shown in documents accompanying the presentation "Tidal Turbine Technology", Peter Fraenkel, Creating an All-Energy Future, Aberdeen, 27 to 28 February 2001.

However, known tidally driven turbines of this type suffer from the drawback that maintenance and repair of electrical control apparatus located in an offshore tower is both difficult and expensive, and the electrical insulation required to prevent ingress of seawater into the control apparatus also increases the cost of the apparatus. Furthermore, there are considerable difficulties associated with applying the known techniques used in wind farms to tidally driven turbines. In particular, turbines having blades of variable pitch are complex and expensive to manufacture, and arrangements used in wind farms in which electrical control equipment is mounted to each generator are very expensive to apply to tidally driven turbines, in which the control apparatus must be located offshore and protected from the marine environment.

Preferred embodiments of the present invention seek to overcome the above disadvantages of the prior art.

According to an aspect of the present invention, there is provided an apparatus for generating electrical power from tidal water movement, the apparatus comprising:-

at least one electrical turbine adapted to be driven by tidal water movement to generate a respective first electrical signal; and

drive means located remotely from the or each said turbine for receiving the or each said first electrical signal, controlling the speed of rotation of the or each said turbine to adjust the efficiency thereof, and outputting at least one second electrical signal to supply electrical power generated by the or each said turbine.

By providing control means located remotely from the or each turbine, this provides the advantage that in the case of tidally-driven turbines being located offshore, the electrical control components can be located onshore. This significantly reduces the cost and difficulty in maintaining and repairing the apparatus, and also significantly reduces the degree of electrical insulation needed to protect the control components. Furthermore, the present invention is based on the surprising discovery that although the speed of tidal water flow varies significantly over time, at a given time the speed does not vary significantly over the area occupied by an installation of several turbines. This enables several turbines to be controlled by a single controlling device located onshore and connected to the turbines by a single cable. This in turn makes the present invention significantly more cost effective than the prior art.

The apparatus of the present invention also has the advantage that it is of significantly simpler construction and maintenance than a conventional apparatus having turbine blades of variable pitch, which significantly reduces the cost of apparatus of the invention compared with such prior art apparatus. Furthermore, by having drive means located remotely from the turbines, it is possible to provide additional drives to add redundancy to the apparatus, and by selectively connecting the additional drives to one or more of the turbines, as opposed to providing additional drives for each turbine, this enables the redundancy to be added more cost effectively.

The apparatus may further comprise feedback means for providing at least one first control signal for use in controlling the speed of rotation of the or each said

turbine by said drive means to adjust the efficiency thereof.

In a preferred embodiment, the apparatus further comprises control means for receiving the or each said second electrical signal and outputting at least one third electrical signal to supply electrical power generated by the or each said turbine, wherein said control means is adapted to control the frequency of the or each said third electrical signal.

This provides the advantage of enabling the efficiency of the or each said turbine to be maximised, while at the same time enabling electrical power generated by the or each said turbine to be transferred efficiently to a supply grid of fixed frequency.

The feedback means may be adapted to apply at least one said first control signal responsive to the frequency of at least one said third electrical signal.

The feedback means may be adapted to apply at least one said control signal, responsive to the velocity of said tidal water movement, to said control means.

This provides the advantage of enabling the efficiency of the or each said turbine to be controlled as the velocity of tidal water movement varies with time.

The apparatus may further comprise AC/DC converter means for receiving the or each said first electrical signal and outputting DC signals to said drive means in response thereto.

The apparatus may further comprise DC/AC converter means for receiving the or each said second electrical signal and outputting said third electrical signals in response thereto.

The drive means may be adapted to control the speed of rotation of at least one said turbine to limit the efficiency thereof.

This provides the advantage of protecting the apparatus from damage in the event of excessive energy output by one or more turbines.

The drive means may be adapted to cause rotation of at least one said turbine from standstill thereof.

This provides the advantage of assisting the turbine to overcome frictional forces during starting thereof.

According to another aspect of the present invention, there is provided a method of generating electrical power from tidal water movement, the method comprising:-

causing at least one electrical turbine to be driven by tidal water movement to generate a respective first electrical signal;

controlling the speed of rotation of the or each said turbine by means of drive means located remotely from the or each said turbine to control the efficiency thereof; and

outputting at least one second electrical signal from said drive means to supply electrical power generated by the or each said turbine.

The method may further comprise the step of controlling the speed of rotation of the or each said turbine in response to the frequency of at least one electrical signal output by said drive means.

The method may further comprise the step of controlling the speed of rotation of the or each said turbine in response to the velocity of said tidal water movement.

The method may further comprise the step of controlling the speed of rotation of at least one said turbine to limit the efficiency thereof.

The method may further comprise the step of using said drive means to cause rotation of at least one said turbine from standstill thereof.

A preferred embodiment of the invention will now be described, by way of example only and not in any limitative sense, with reference to the accompanying drawing in which:-

Figure 1 is a schematic view of a tidally operated electricity generator embodying the present invention.

Referring to Figure 1, a tidally driven electricity generator 1 has a series of turbines 2, each of which is mounted under water in an offshore location, for example suspended from floating buoys or anchored by cables to the sea bed, using methods which will be familiar to persons skilled in the art. Each turbine 2 has blades 3 which are rotated by tidal flow of water, to power a respective generator 4, which outputs AC electrical power via a respective transformer 5 to a cable 6 and appropriate switchgear 7.

The cable 6 is connected to a further transformer 8 located onshore, and the transformer 8 is connected to two AC inputs of a drive 9 containing an AC/DC converter, one input 10 of which is connected via a cable to a control feedback device 11. The control feedback device 11 may be a flow meter which determines the velocity of the tidal flow, or may contain look-up tables containing information relating to the velocity of tidal flow at any particular time.

The drive 9 outputs DC electrical signals along cabling 13 to DC/AC converter 14, which outputs AC electrical power via transformer 15 to a fixed frequency local supply grid 16. The drive 9 also controls the speed of rotation of each turbine 2 by adjustment of the frequency of signals output to the turbines from the drive 9 via switchgear 7, in a manner which will be familiar to persons skilled in the art.

The operation of the apparatus shown in Figure 1 will now be described.

The speed of tidal water flow through the individual turbines 2 does not vary significantly between individual turbines at a given time, although it will be appreciated by persons skilled in the art that this speed can vary significantly over time. The efficiency of operation of each turbine is controlled by controlling the speed of rotation of each turbine, which in turn controls the angle of incidence between fluid driving the turbine and the blades 3 of the turbine.

When the speed of rotation of each turbine 2 has been set, by means of a controller in the drive 9, to operate at a given efficiency, the frequency of electricity output by each generator 4 depends upon that speed of rotation, and will be generally the same for all of the turbines. The

electrical output signals are then input to drive 9 and are output via DC/AC converter 14 and transformer 15 to the local grid 16. However, because the frequency of the electrical signals output by the turbines 2 can be different from that of the grid 16, the controller in drive 19 can vary the frequency of electrical signals output at cabling 13. As a result, the frequency of AC electrical power supplied by transformer 15 to the local supply grid 16 can be matched to that of the grid 16 for optimum power transfer. The drive 9 may be controlled by a feedback loop (not shown) matching the output frequency of DC/AC converter 14 to the grid 16.

In addition to controlling the speed of rotation of the turbines 2 during normal operation so that they operate at maximum efficiency, the drive 9 may also be used to drive the turbines 2 during start-up of the generator to assist in overcoming frictional forces. Furthermore, in order to prevent damage to the generator caused by excessive power output, the drive 9 may also adjust the speed of rotation of each turbine to limit the efficiency of operation of the turbines.

It will be appreciated by persons skilled in the art that the above embodiment has been described by way of example only, and not in any limitative sense, and that various alterations and modifications are possible without departure from the scope of the invention as defined by the appended claims. For example, it will be appreciated that the present invention can be used with turbines having blades of variable as well as fixed pitch.

CLAIMS

1. An apparatus for generating electrical power from tidal water movement, the apparatus comprising:-

at least one electrical turbine adapted to be driven by tidal water movement to generate a respective first electrical signal; and

drive means located remotely from the or each said turbine for receiving the or each said first electrical signal, controlling the speed of rotation of the or each said turbine to adjust the efficiency thereof, and outputting at least one second electrical signal to supply electrical power generated by the or each said turbine.

2. An apparatus according to claim 1, further comprising feedback means for providing at least one first control signal for use in controlling the speed of rotation of the or each said turbine by said drive means to adjust the efficiency thereof.

3. An apparatus according to claim 1 or 2, further comprising control means for receiving the or each said second electrical signal and outputting at least one third electrical signal to supply electrical power generated by the or each said turbine, wherein said control means is adapted to control the frequency of the or each said third electrical signal.

4. An apparatus according to claims 2 and 3, wherein said feedback means is adapted to apply at least one said first control signal responsive to the frequency of at least one said third electrical signal.

5. An apparatus according to any one of claims 2 to 4, wherein said feedback means is adapted to apply at least one said control signal, responsive to the velocity of said tidal water movement, to said control means
6. An apparatus according to any one of the preceding claims, further comprising AC/DC converter means for receiving the or each said first electrical signal and outputting DC signals to said drive means in response thereto.
7. An apparatus according to claim 6, further comprising DC/AC converter means for receiving the or each said second electrical signal and outputting said third electrical signals in response thereto.
8. An apparatus according to any one of the preceding claims, wherein said drive means is adapted to control the speed of rotation of at least one said turbine to limit the efficiency thereof.
9. An apparatus according to any one of the preceding claims, wherein said drive means is adapted to cause rotation of at least one said turbine from standstill thereof.
10. An apparatus for generating electrical power from tidal water movement, the apparatus substantially as hereinbefore described with reference to the accompanying drawing.
11. A method of generating electrical power from tidal water movement, the method comprising:-

causing at least one electrical turbine to be driven by tidal water movement to generate a respective first electrical signal;

controlling the speed of rotation of the or each said turbine by means of drive means located remotely from the or each said turbine to control the efficiency thereof; and

outputting at least one second electrical signal from said drive means to supply electrical power generated by the or each said turbine.

12. A method according to claim 11, further comprising the step of controlling the speed of rotation of the or each said turbine in response to the frequency of at least one electrical signal output by said drive means.

13. A method according to claim 11 or 12, further comprising the step of controlling the speed of rotation of the or each said turbine in response to the velocity of said tidal water movement.

14. A method according to any one of claims 11 to 13, further comprising the step of controlling the speed of rotation of at least one said turbine to limit the efficiency thereof.

15. A method according to any one of claims 11 to 14, further comprising the step of using said drive means to cause rotation of at least one said turbine from standstill thereof.

16. A method of generating electrical power from tidal water movement, the method substantially as hereinbefore described with reference to the accompanying drawing.

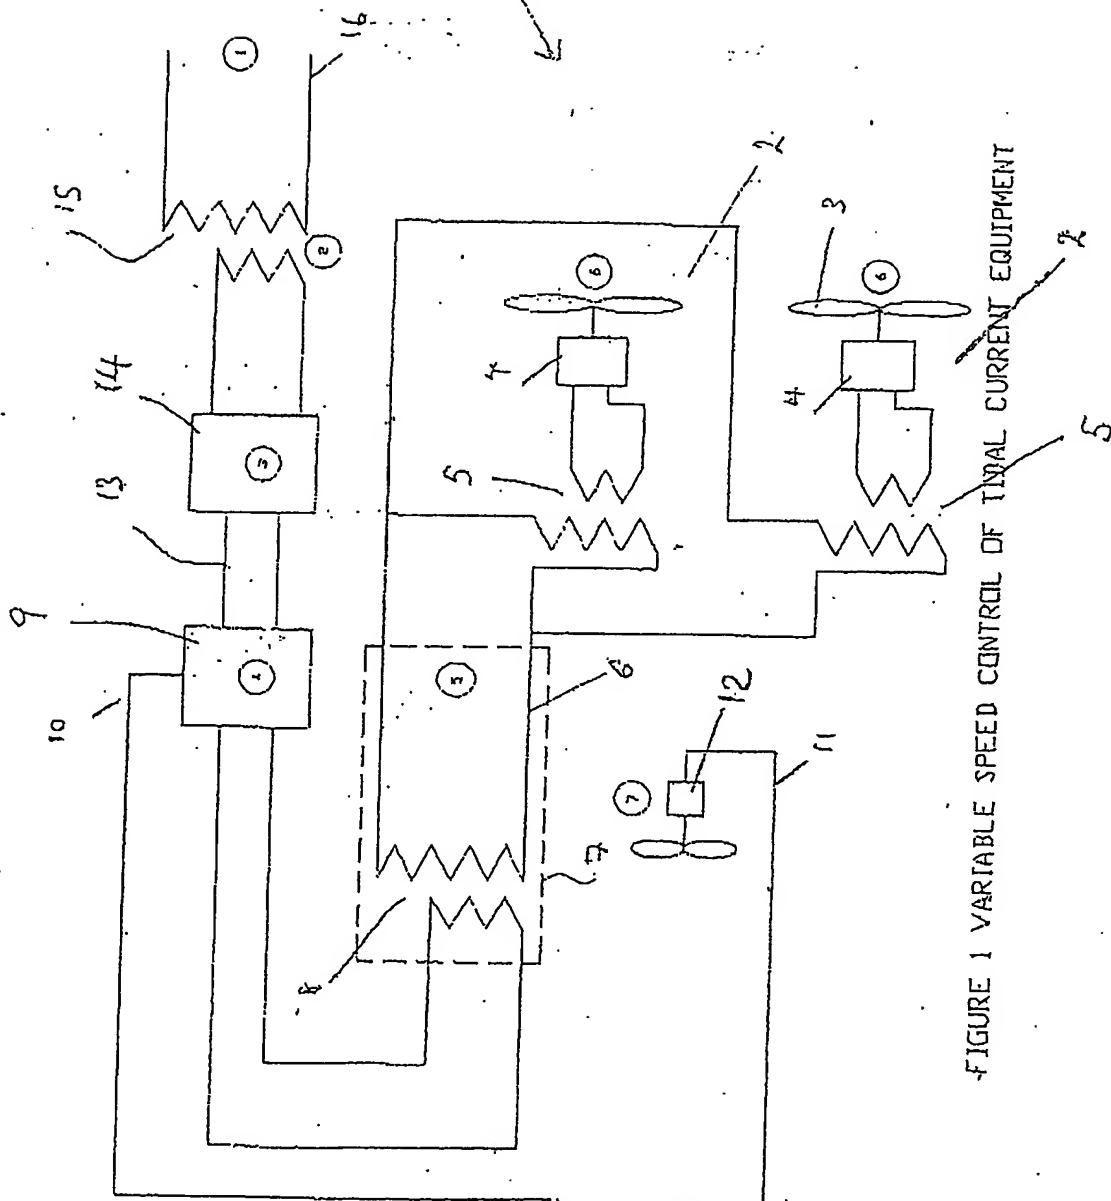


FIGURE 1 VARIABLE SPEED CONTROL OF TIDAL CURRENT EQUIPMENT

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.